


NSI PART #	NUMBER OF PORTS	FIGURE	WIRE RANGE AL/CU	HEX SIZE	L	H	W	A	B	C	D	ØE	MAX TIGHTENING TORQUE IN/LBS
300T-2	2	1	300 - 6	5/16	3.00	2.00	1.00	.47	1.00	N/A	.31	.33	275
350T-2	2	2	350 - 6	5/16	3.56	2.00	1.06	.47	1.56	.60	.25	.33 X .43	275
600T-2	2	3	600 - 2	3/8"	4.91	3.00	1.50	.38	2.34	1.38	.75	.41	375
600T-3	3	4	600 - 2	3/8"	4.91	3.00	2.50	.38	2.34	1.38	.75	.41	375
600T-4	4	5	600 - 2	3/8"	4.91	3.00	2.50	.38	2.34	1.38	.75	.41	375
800T-2	2	3	800 - 300	1/2	4.91	3.00	1.50	.38	2.34	1.38	.75	.41	500
800T-3	3	4	800 - 300	1/2	4.91	3.00	2.63	.38	2.34	1.38	.75	.41	500
800T-4	4	5	800 - 300	1/2	4.91	3.00	2.63	.38	2.34	1.38	.75	.41	500

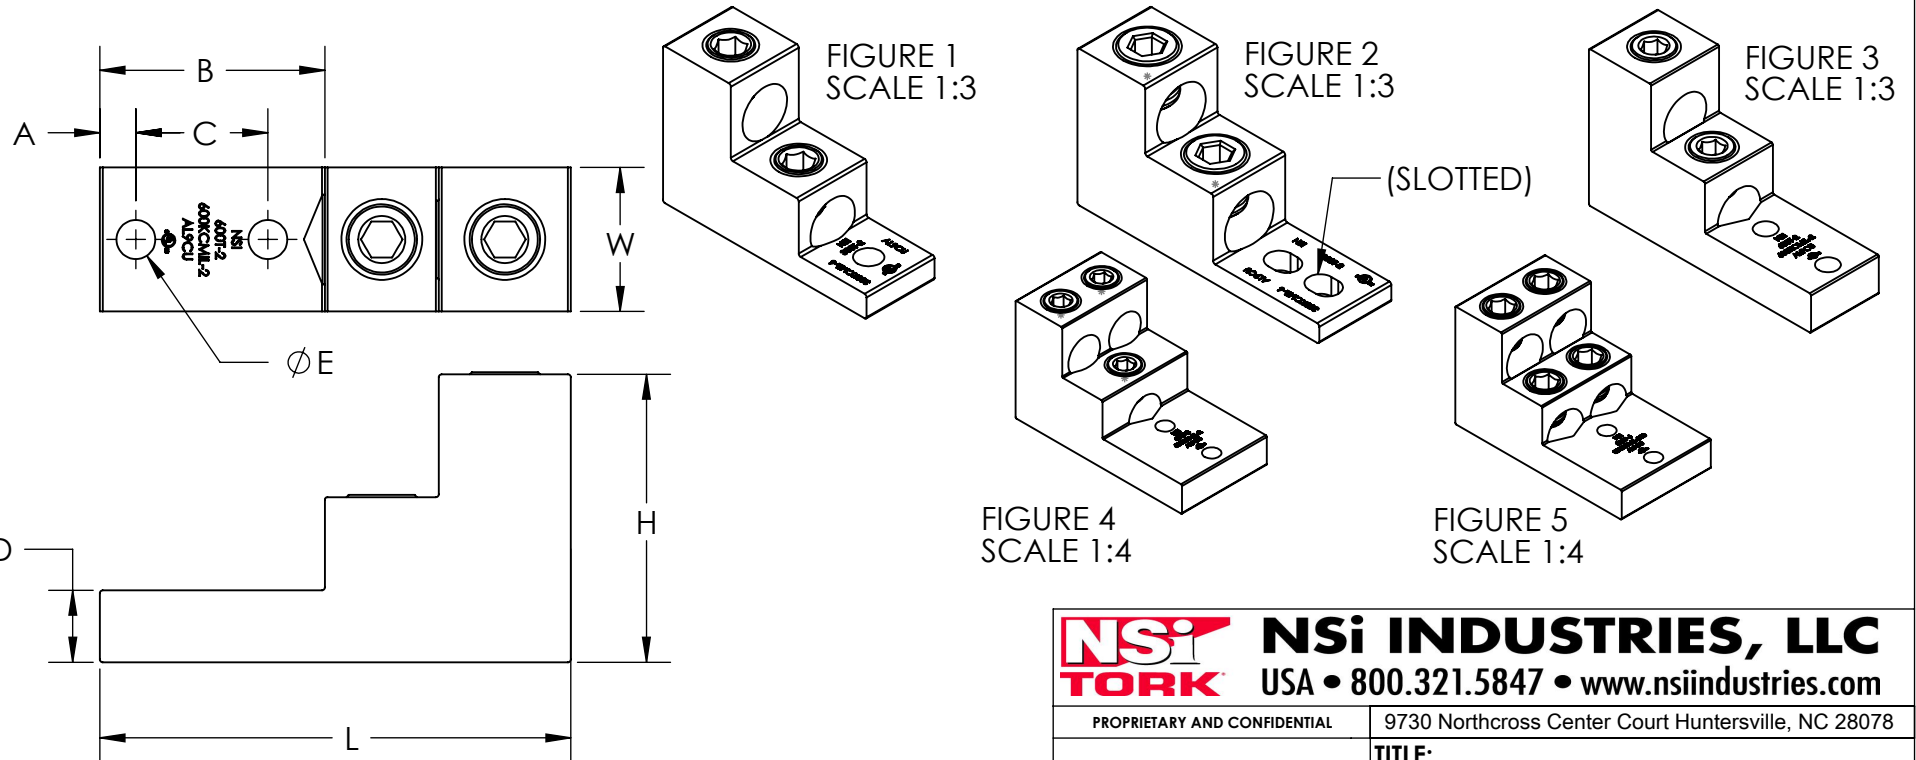

NOTES:

1. TIN PLATED 6061-T6511 ALUMINUM ALLOY.
2. UL LISTED 90° C FOR COPPER AND ALUMINIUM CONDUCTOR.

**NSI** **NSI INDUSTRIES, LLC**  
**TORK** USA • 800.321.5847 • www.nsiindustries.com

PROPRIETARY AND CONFIDENTIAL		9730 Northcross Center Court Huntersville, NC 28078	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NSI Industries, LLC. REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: <b>NSI STACKED LUG SERIES</b>	
NAME	DATE	DWG. NO.	
DRAWN BY: KM	4/13/2011	NSI STACKED LUG SERIES	
MATERIAL: 6061-T6511 ALUMINUM		SCALE: 1:1	SHEET: 1 OF 1