


**FEATURES:**

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSI compression tool (N12ID).
6. Dimensions are for reference only.



# C Series: C-250



PROGRAM:	SOLIDWORKS
UPDATED:	9/2022
SALES REV:	A
SIZE:	B (11x17)

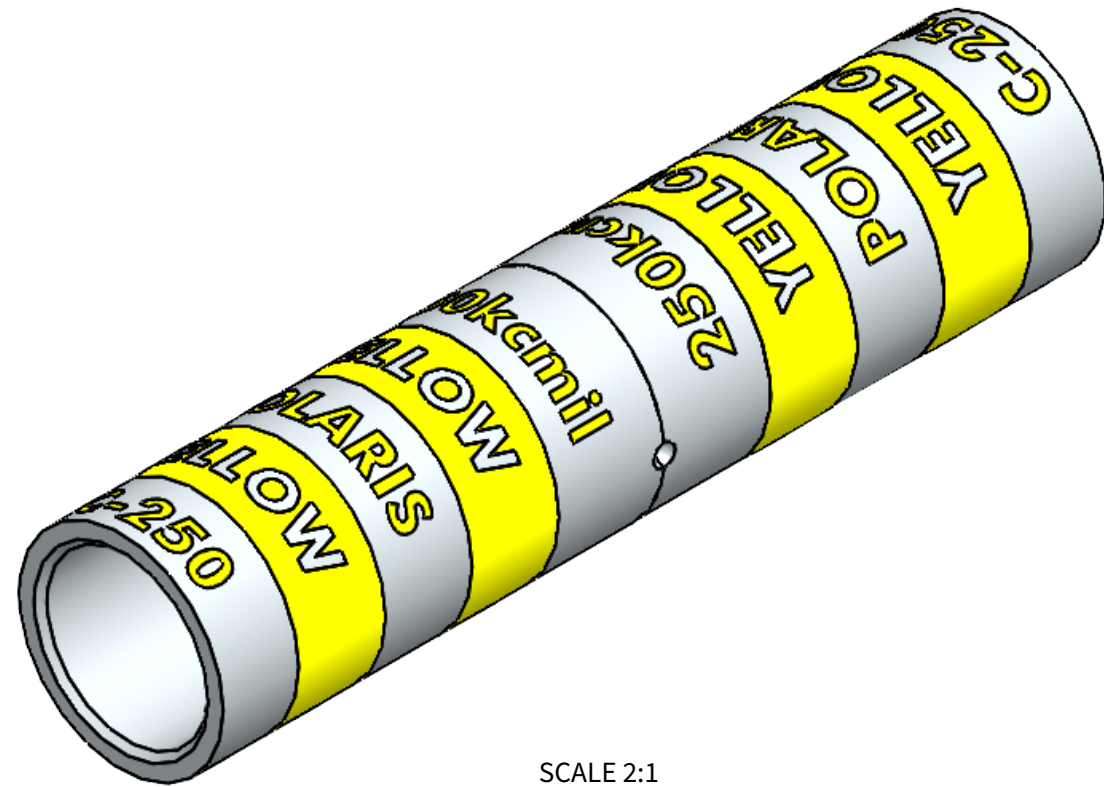

SCALE 2:1

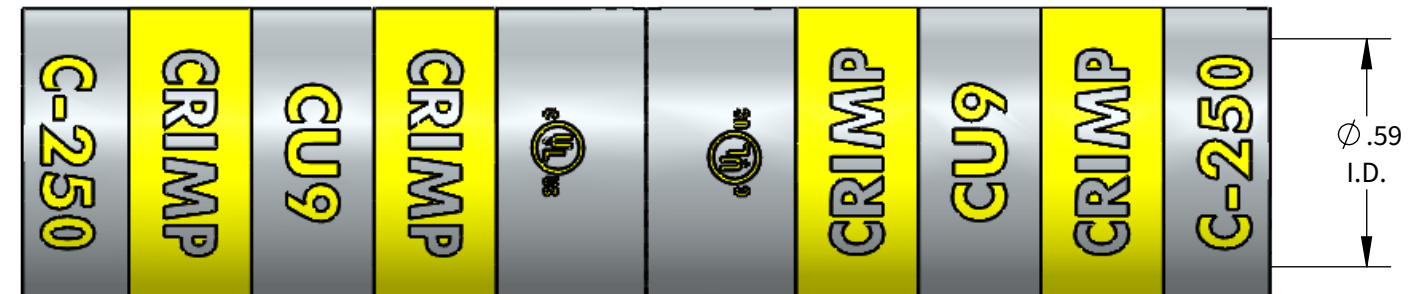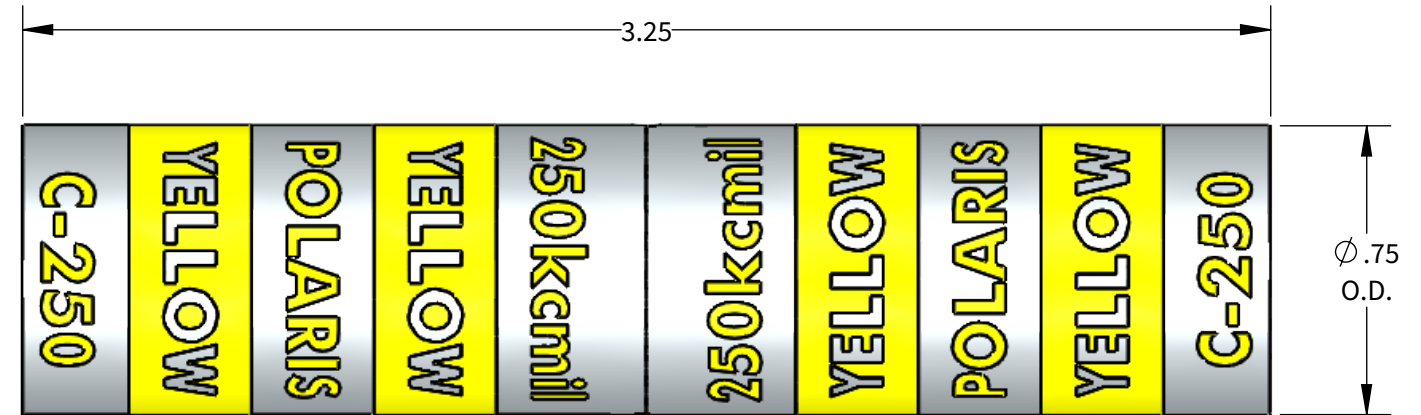

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N12ID	NSI		GREENLEE & ILSCO		BURNDY	T&B	HUSKIE	
				N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15	Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C	
250kcmil	1-13/16"	YELLOW	250kcmil-1/0AWG	KC12-250 (2)	CD14 (4)	HT41BE (4)	KC12-250 (2)    ILD-11 (4)	U29RT (4)	15510-CK (4)	HT41BE (4)	CD14 (4)

