


FEATURES:

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSI compression tool (N121D).
6. Dimensions are for reference only.



C Series: C-600



PROGRAM:	SOLIDWORKS
UPDATED:	9/2022
SALES REV:	A
SIZE:	B (11x17)

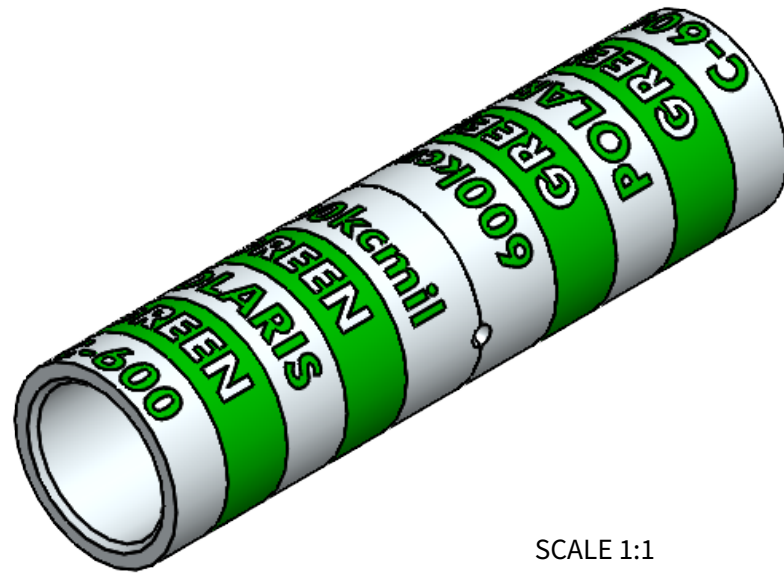

SCALE 1:1

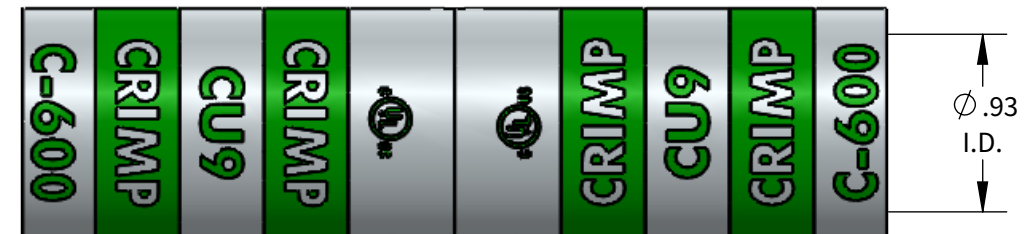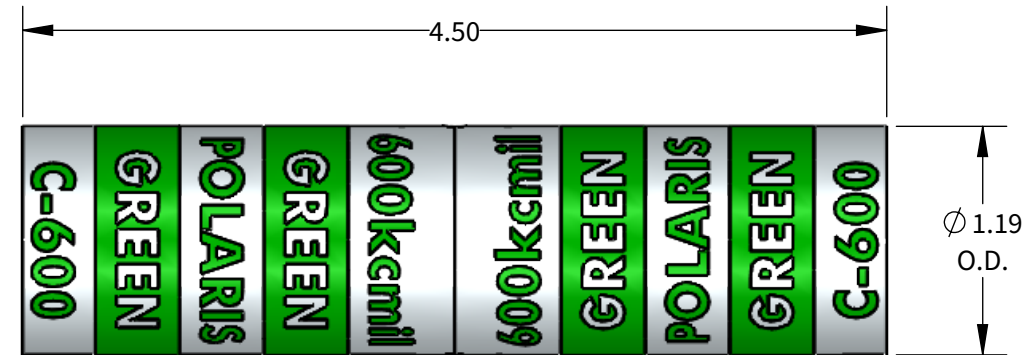

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N121D	COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)								
				NSI			GREENLEE & ILSCO		BURNDY	T&B	HUSKIE	
				N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15		Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C	
600kcmil	2-7/16"	GREEN	600kcmil-250kcmil	KC12-600 (2)	CD19 (4)	HT41BM (4)	KC12-600 (2)	ILD-16 (4)	U36RT (4)	15536-CK (4)	HT41BM (4)	CD19 (4)

