


FEATURES:

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N121D).
6. Dimensions are for reference only.



C Series: C-8



| | |
|------------|------------|
| PROGRAM: | SOLIDWORKS |
| UPDATED: | 9/2022 |
| SALES REV: | A |
| SIZE: | B (11x17) |

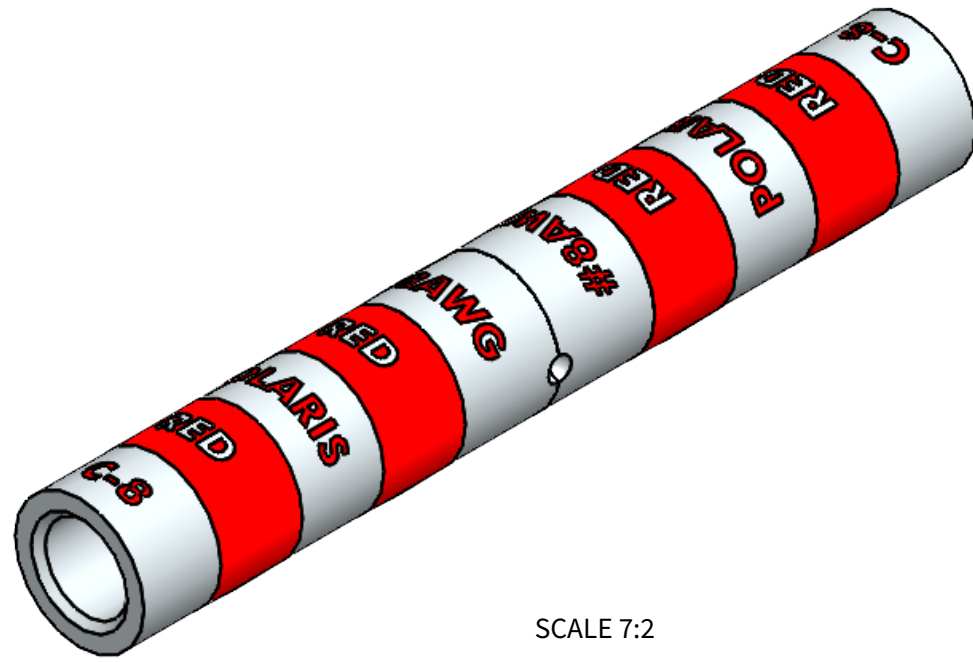

SCALE 7:2

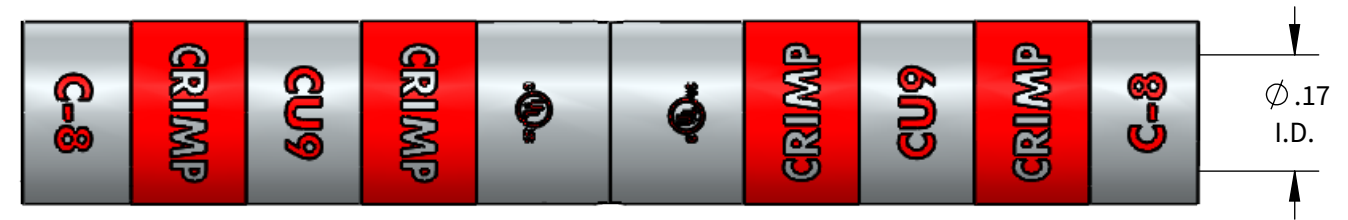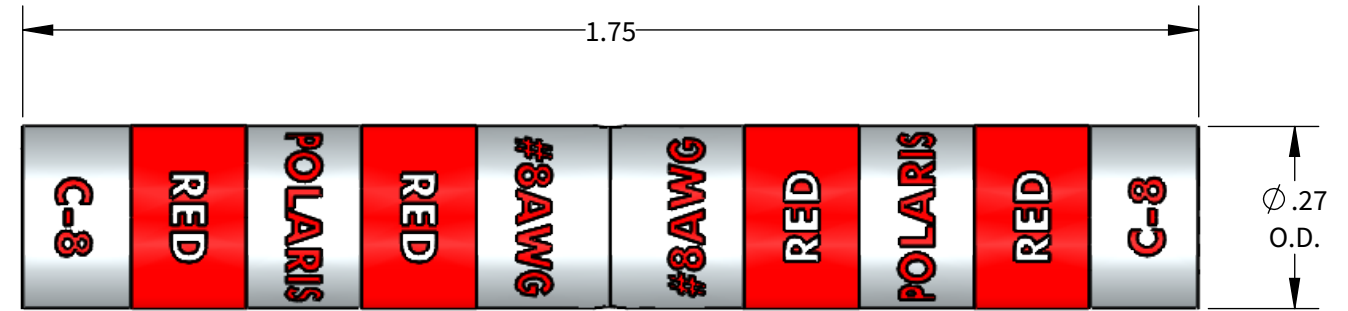

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

| WIRE SIZE | STRIP LENGTH | DIE COLOR | EXPANDED WIRE RANGE W/N121D | COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE) | | | | | | | | |
|-----------|--------------|-----------|-----------------------------|--|--------|--------|--|-----------|---------------------|-----------------|--------|---|
| | | | | NSI | | | GREENLEE & ILSCO | | BURNDY | T&B | HUSKIE | |
| | | | | N1240 SERIES | NSI-12 | NSI-12 | GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15 | | Y-35, Y750, PAT 750 | TBM-15, TBM-14M | EP510C | |
| #8AWG | 15/16" | RED | #8AWG | KC12-8 (2) | - | - | KC12-8 (2) | ILD-1 (4) | U8CRT (2) | 15520 (4) | - | - |

