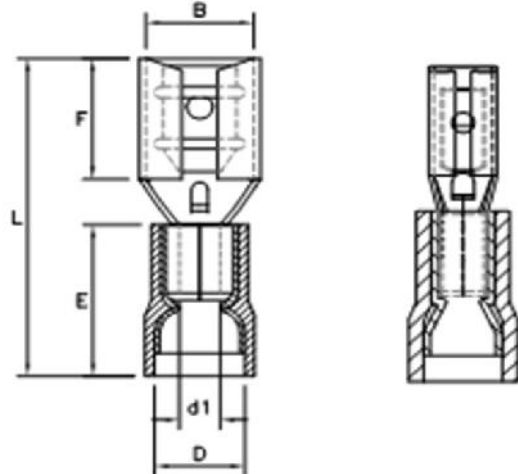



## Vinyl Insulated Female Disconnects

	
<b>Drawn - SD</b>	
<b>Approved - KM</b>	
<b>Material - Brass / Vinyl Insulation</b>	
<b>Title - Vinyl Insulated Female Disconnects</b>	
	

Part Number	Wire Range	Insulated Color	Electrical Rating Max	B	F	L	E	D	d1
F22-110-2V	22-18 AWG	RED	75C / 300 VOLTS	0.1259	0.2519	0.7283	0.3937	0.1692	0.0669
F22-187-2V	22-18 AWG	RED	75C / 300 VOLTS	0.1968	0.2559	0.7480	0.3937	0.1692	0.0669
F22-250-3V	22-18 AWG	RED	75C / 300 VOLTS	0.2598	0.3110	0.8267	0.3937	0.1692	0.0669
F16-187-2V	16-14 AWG	BLUE	75C / 300 VOLTS	0.1968	0.2559	0.7480	0.3937	0.1968	0.0905
F16-187-3V	16-14 AWG	BLUE	75C / 300 VOLTS	0.1968	0.2559	0.7480	0.3937	0.1968	0.0905
F16-250-3V	16-14 AWG	BLUE	75C / 300 VOLTS	0.2598	0.3110	0.8267	0.3937	0.1968	0.0905
F12-250-3V	12-10 AWG	YELLOW	75C / 300 VOLTS	0.2598	0.3110	0.9251	0.4921	0.2559	0.1338