

**FEATURES:**

1. Material: Tin Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor only.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.


# GL-N Series: GL40N-38



|            |            |
|------------|------------|
| PROGRAM:   | SOLIDWORKS |
| UPDATED:   | 4/2022     |
| SALES REV: | A          |
| SIZE:      | B (11x17)  |



SCALE 2:1

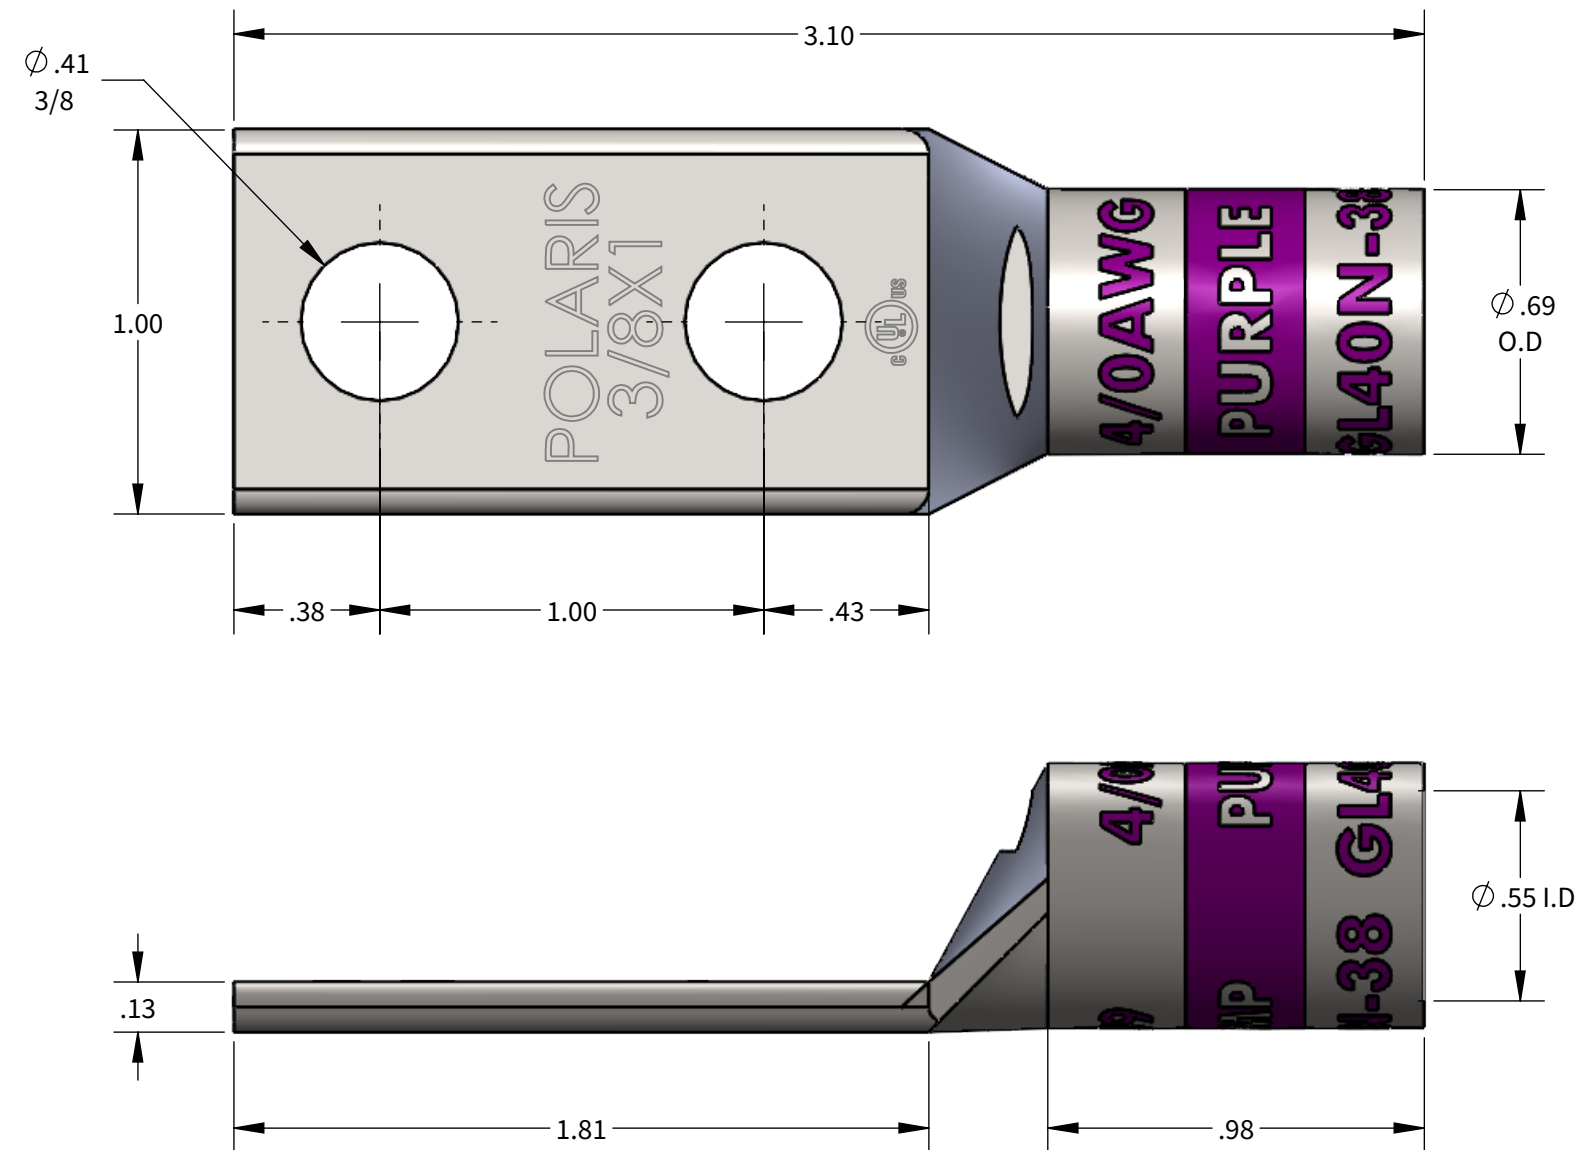

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS)

| WIRE SIZE | STRIP LENGTH | DIE COLOR | EXPANDED WIRE RANGE W/N12ID | COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS) |          |            |              |                      |              |                     |                 |            |          |
|-----------|--------------|-----------|-----------------------------|---|----------|------------|--------------|----------------------|--------------|---------------------|-----------------|------------|----------|
|           |              |           |                             | NSI   |          | GREENLEE   | ILSCO        |                      | BURNDY       | T&B                 | HUSKIE          |            |          |
|           |              |           |                             | N1240 SERIES  | NSI-12   | NSI-12     | 1240 SERIES  | ILC-12/ILC-15 SERIES |              | Y-35, Y750, PAT 750 | TBM-15, TBM-14M | EP510C     |          |
| 4/0AWG    | 1-1/16"      | PURPLE    | 4/0AWG-#1AWG                | KC12-4/0 (1)  | CD12 (2) | HT41BC (2) | KC12-4/0 (1) | ILD-10 (2)           | KC12-4/0 (1) | U28RT (2)           | 15511 (2)       | HT41BC (2) | CD12 (2) |

