


Nylon Fully Insulated Female Disconnects

Drawn - SD

Approved - KM

Material - Steel / Nylon Insulation

Title - Nylon Fully Insulated Female Disconnects

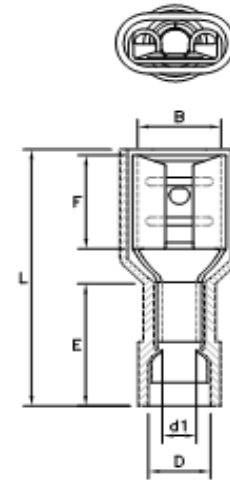

Part Number	Wire Range	Insulated Color	Electrical Rating Max	B	F	L	E	D	d1
IF22-250-3N	22-18 AWG	RED	105C / 600V	0.2598	0.3110	0.8661	0.4133	0.1653	0.0669
IF22-250-3N-BULK	22-18 AWG	RED	105C / 600V	0.2598	0.3110	0.8661	0.4133	0.1653	0.0669
IF22-187-2N	22-18 AWG	RED	105C / 600V	0.3200	0.2500	0.7800	0.4133	0.1653	0.0669
IF22-187-3N	22-18 AWG	RED	105C / 600V	0.3200	0.2500	0.7800	0.4133	0.1653	0.0669
IF22-187-3N-BULK	22-18 AWG	RED	105C / 600V	0.3200	0.2500	0.7800	0.4133	0.1653	0.0669
IF16-250-3N	16-14 AWG	BLUE	105C / 600V	0.2598	0.3110	0.8661	0.4133	0.1929	0.0905
IF16-250-3N-BULK	16-14 AWG	BLUE	105C / 600V	0.2598	0.3110	0.8661	0.4133	0.1929	0.0905
IF12-250-3N	12-10 AWG	YELLOW	105C / 600V	0.2598	0.3110	0.9645	0.5118	0.2559	0.1338
IF12-250-3N-BULK	12-10 AWG	YELLOW	105C / 600V	0.2598	0.3110	0.9645	0.5118	0.2559	0.1338