

FEATURES:

1. Material: Tin Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor only.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only, tolerance is +/- .06".


LN Series: L600N-38



| | |
|------------|------------|
| PROGRAM: | SOLIDWORKS |
| UPDATED: | 4/2022 |
| SALES REV: | A |
| SIZE: | B (11x17) |



SCALE 1:1

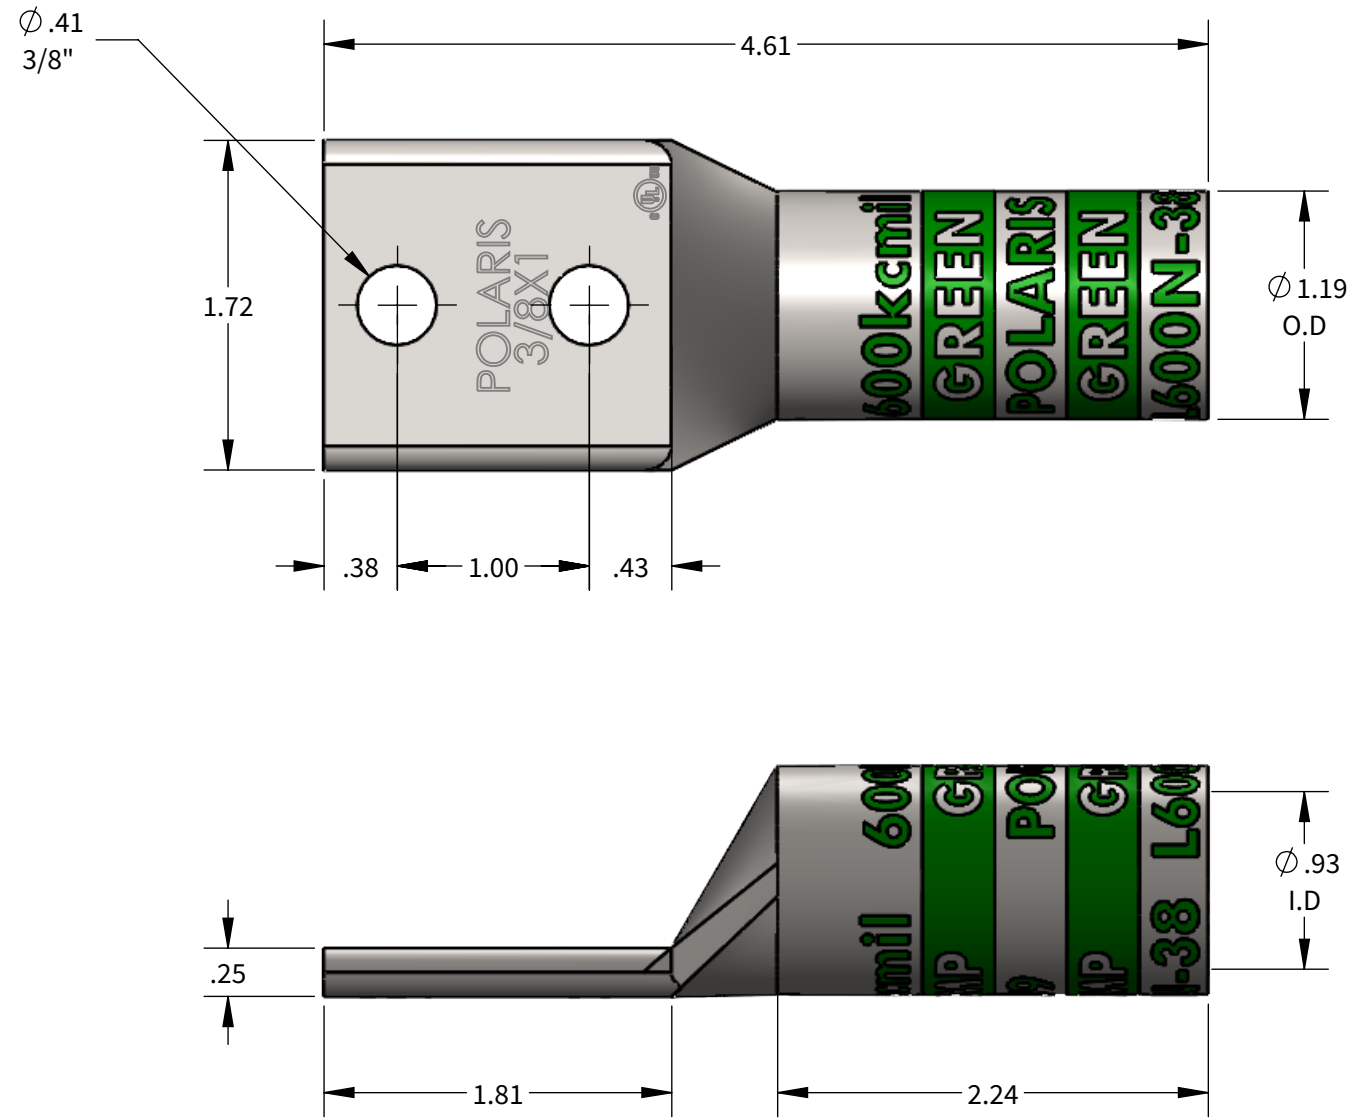

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS)

| | | | NSI | | | | GREENLEE | | ILSCO | BURNDY | T&B | HUSKIE | |
|-----------|--------------|-----------|-----------------------------|--------------|----------|------------|--------------|------------|----------------------|---------------------|-----------------|------------|----------|
| WIRE SIZE | STRIP LENGTH | DIE COLOR | EXPANDED WIRE RANGE W/N12ID | N1240 SERIES | NSI-12 | NSI-12 | 1240 SERIES | | ILC-12/ILC-15 SERIES | Y-35, Y750, PAT 750 | TBM-15, TBM-14M | EP510C | |
| 600kcmil | 2-3/8" | GREEN | 600kcmil-250kcmil | KC12-600 (2) | CD19 (4) | HT41BM (4) | KC12-600 (2) | ILD-16 (4) | KC12-600 (2) | U36RT (4) | 15536-CK (4) | HT41BM (4) | CD19 (4) |

