

**FEATURES:**

1. FOR DEAD-ENDING SELF-SUPPORTING DROP WIRE.
2. SAVES CONDUCTOR-DROP WIRE MAY BE CU TO EXACT LENGTH.
3. CAN BE ATTACHED TO BARE NEUTRAL IN ANY POINT IN THE SPAN.
4. ADJUSTMENT IN DROP WIRE SAG ARE EASILY MADE.
5. GRIPS ACSR, AAAC OR ALUMINUM CONDUCTOR.
6. TEMPERATURE & VOLTAGE RATING: 90C, 600V MAX

## Aluminum Service Wedge Clamps W-Series

CAT.NO	DESCRIPTION	FIG. NO.	ACSR	WIRE RANGE ALUMINUM	AAAC	LENGTH (L)	WIDTH (D)	CONDUCTOR	VALUE (lb.)	STD.CTN.QTY.
W62-1	W-1 Series aluminum wedge and slider	1	2-6	1 STR-6 SOL	2-6	12.000	2.375	26/ 1 ACSR	1200	12
W62-1FC		2	2-6	1 STR-6 SOL	2-6	17.500	FLEX	26/ 1 ACSR	1200	12
W20-1		1	1/0-4	2/0 STR-2 SOL	1/0-4	12.500	2.375	1/ 06/1 ACSR	1800	8
W20-1FC		2	1/0-4	2/0 STR-2 SOL	1/0-4	18.500	FLEX	1/ 06/1 ACSR	1800	8
W40-1		1	4/0-2/0	4/0 STR-2/0 SOL	4/0-2/0	12.750	2.375	4/06/ 1 ACSR	1900	6
W40-1FC		2	4/0-2/0	4/0 STR-2/0 SOL	4/0-2/0	18.500	FLEX	4/06/ 1 ACSR	1900	6

DIMENSIONS ARE INCHES AND ARE SUBJECT TO CHANGE WITHOUT NOTICE  
W40 series clamps rated 850 lb. ultimate tensions for 1/0 ACSR, AL or AAAC  
NOTES: Catlog numbers with "FC" suffix have a flexible bail.

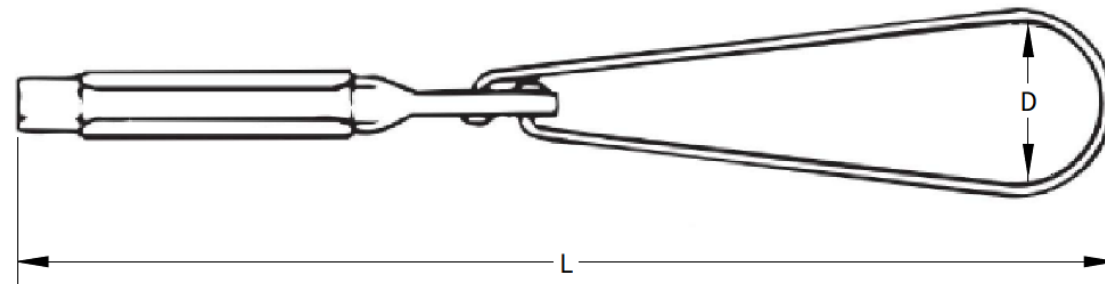


FIGURE 1: RIGID STAINLESS STEEL BAIL

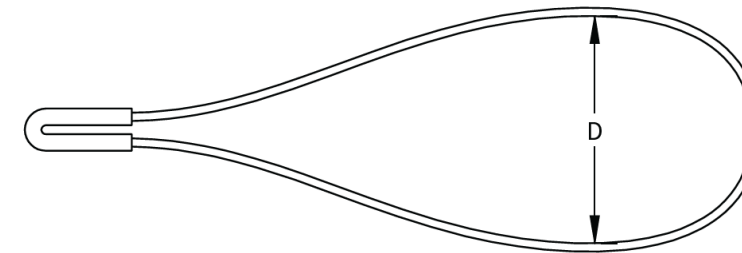


FIGURE 2: "FC" FLEXIBLE BAIL

UL SPECIFICATIONS

UL486 LISTED FOR WIRE CONNECTORS

TO ORDER NSI PRODUCTS CALL  
CUSTOMER SERVICE DEPT  
@800-321-5847

FOR NAME OF LOCAL SALES AGENT  
techteam@nsiindustries.com

FOR PRODUCT INFO: www.nsiindustires.com

nsiindustries.com/contactus 800.321.5847

