


# EASY-TWIST<sup>®</sup> WIRE CONNECTORS

## TWIST-ON WIRE CONNECTORS

### FEATURES & BENEFITS

- A)** Extra thick end cap prevents wire breakthroughs
- B)** Color-coded thermoplastic shell is flame retardant to UL94V-2 standards for electrical insulation
- C)** Electro tin-plated steel springs made from square wire bite in fewer twists
- D)** Swept-back wing design is ergonomic for applying torque without straining fingers
- E)** Deep skirt entry provides protection from flash-over and shorts

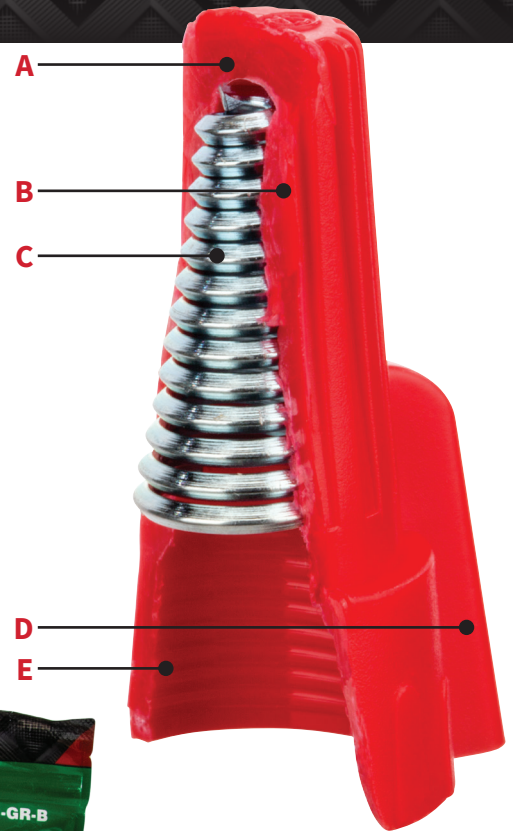

Scan for a complete listing of wire combinations and voltage ratings



Winged Wire Connectors



Standard Wire Connectors



### STANDARD

Max Operating Temp. 105°C/ 221°F



### HIGH TEMPERATURE

Max Operating Temp. 150°C/ 302°F



### WINGED

Max Operating Temp. 105°C/ 221°F

## PRODUCT GUIDE

	MODEL	COLOR	WIRE RANGE	MINIMUM	MAXIMUM
STANDARD	WC-G	GRAY	22-16	4 # 22	2 #16
	WC-B	BLUE	22-14	2 #22	1 #14
	WC-O	ORANGE	22-14	5 # 22	2 #14
	WC-Y	YELLOW	8-22	2 #22	1 #8
	WC-R	RED	22-10	3 #18	2 #10
HIGH TEMP	WC-HB1	BLACK	22-18	1 #22	2 #18
	WC-HB3	BLACK	22-14	1 #14 with 1 #22	1 #14
WINGED	WWC-G	GRAY	18-10	4 #14 with 1 #18	2 #10
	WWC-B	BLUE	14-6	1 #10 with 1 #14	1 #6
	WWC-T	TAN	22-10	4 #22	3 #10
	WWC-Y	YELLOW	18-10	5 #18	1 #10
	WWC-R	RED	22-6	4 #22	1 #6
COMPACT WINGED	WWC-N1	YELLOW	22-10	4 #22	3 #12
	WWC-N2	RED	22-6	3 #20	1 #8 with 3 #12
GROUNDING	WWC-GR	GREEN	14-12	4 #14	5 #12

⚠ WARNING: Cancer and reproductive harm. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ AVERTISSEMENT: Cancer et effets nocifs sur la reproduction. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ ADVERTENCIA: Cáncer y daños al sistema reproductivo. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

\* For complete listing of wire range capacity and voltage ratings, contact NSI Customer Service at 800-321-5847

\* Para una lista completa de combinaciones de cable y capacidades de voltaje, contacte a Servicio al cliente de NSI llamando al 800-321-5847

