


FEATURES:

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N121D).
6. Dimensions are for reference only.



C Series: C-3/0



PROGRAM:	SOLIDWORKS
UPDATED:	9/2022
SALES REV:	A
SIZE:	B (11x17)

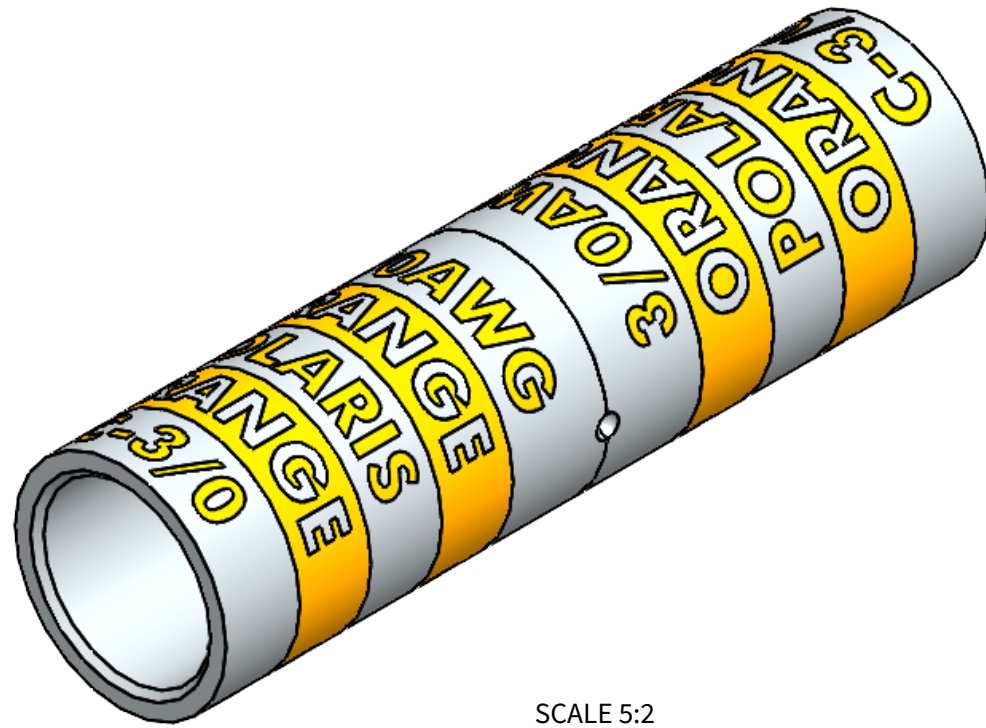

SCALE 5:2

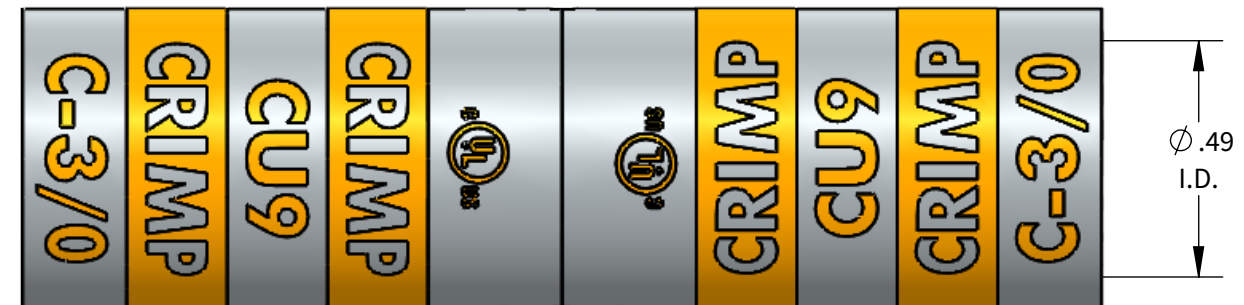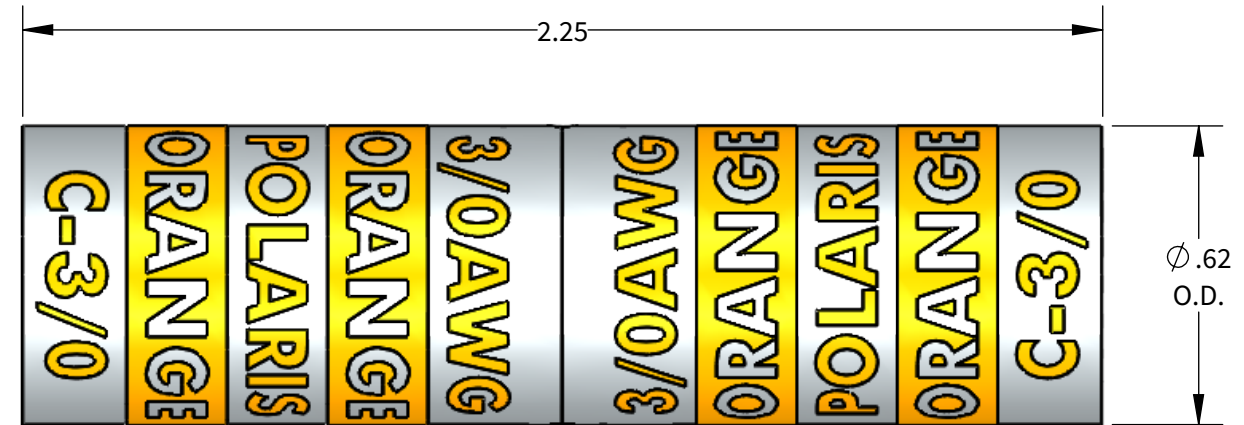

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N121D	COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)								
				NSI			GREENLEE & ILSCO		BURNDY	T&B	HUSKIE	
3/0AWG	1-3/16"	ORANGE	3/0AWG-#2AWG	N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15		Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C	
				KC12-3/0 (2)	CD10 (4)	HT41BA (4)	KC12-3/0 (2)	ILD-9 (4)	U27RT (2)	15530 (4)	HT41BA (4)	CD10 (4)

